

中联重科

ZDH138

矿用一体式钻机

Integrated Mining Drill

整机质量 Weight 16 t

钻孔直径 Drill Diameter 115 mm / 140 mm


ZOOMLION

颜色组合已取得注册商标保护

Adopts lubrication screw air compressor with excellent energy efficiency ratio and 3000N·M high torque rotary head to realize fast rock drilling with high wind pressure. It has excellent fuel economy performance, more energy saving and environmental protection.

Yuchai engine with high reliability and strong power; Advanced high pressure common rail electronic control fuel injection technology ,intake air-to-air intercooling technology,turbocharging technology, cold start electric control preheating technology.

整车尺寸参数

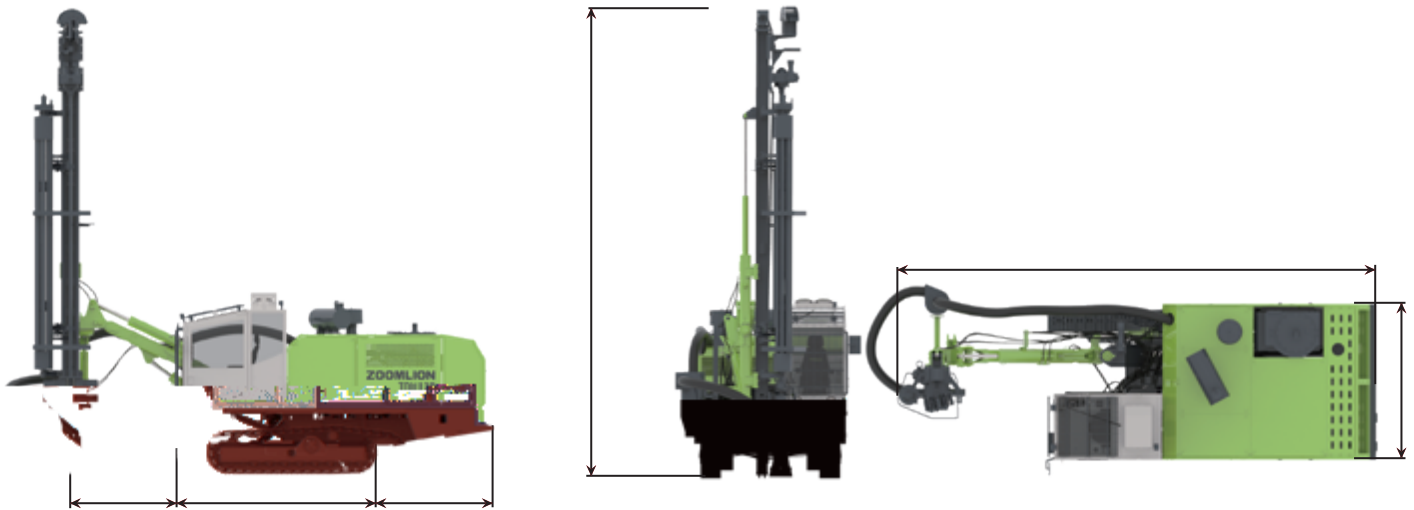

整车性能参数

主要参数 Main Parameters	单位 Unit	数值 Value	主要参数 Main Parameters	单位 Unit	数值 Value
Weight	kg	16000	Rated Power	kW/rpm	265/2000
Hole Diameter	mm	φ115-140	Max. Traveling Speed	km/h	3
Number of Storagerods		6+1	Climbing Ability	°	
Drill Rod Specification	mm	φ76x4000	Track Frame Swing	°	±10
Engine Model	/	YC6MK360-T3	Ground Clearance	mm	420
主要参数 Main Parameters			单位 Unit	数值 Value	
Rotary Head	Max. Working Torque		N·m	3000	
	Rotary Speed		rpm	0-105	
Air Compressor	FAD		m ³	18/18.6	
	Max. Working Pressure		bar	17/20	
Feed Beam	Max. Tractive Pull		kN	20	
	Travel Length		mm	4800	
	Travel Compensation		mm	1200	

